



BUDVAR

windows more lasting than others

T-Passive Perfekt in oak standard

**ENERGY-EFFICIENT
WINDOWS
FOR EVERY HOME**

**T-PASSIVE
PERFEKT**

T-Passive Perfekt



EUROPEAN
STANDARDS





S CLASS



TITANIUM
TECHNOLOGY



LEAD
FREE

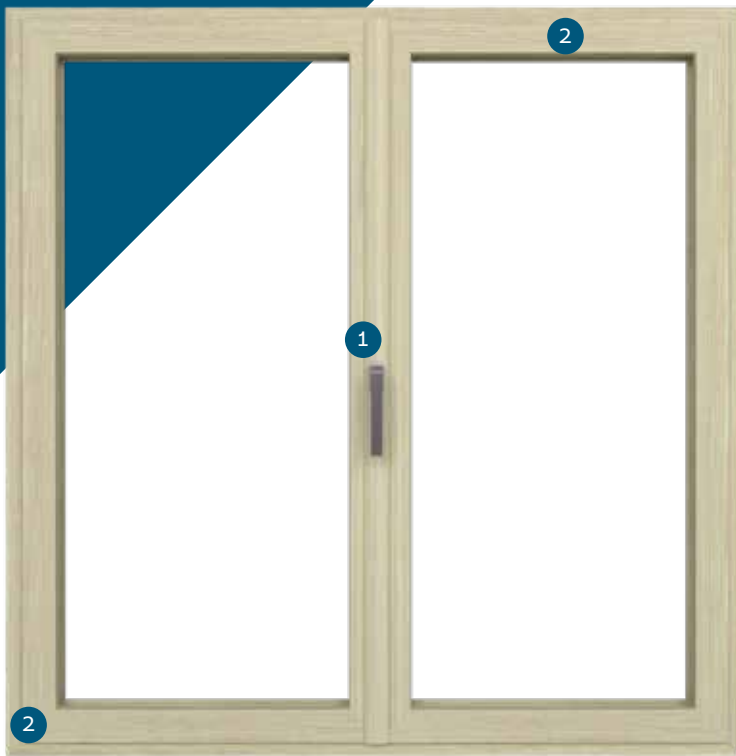

Even more light in your home with the option of a narrow floating mullion with a centrally located handle.



Unprecedented aesthetics created through invisible welds and straight frame-edges.



T-Passive Perfekt in white oak with central handle; HOPPE Toulon Secustik® latch in steel F9; hidden hinges

T-Passive Perfekt – perfect thermal insulation, subtle and modern design

Windows designed for people looking for energy-efficient solutions at an attractive price. Excellent insulation properties ensure thermal comfort for residents, and the subtle design provides very good lighting for rooms. Simple profile geometry perfectly matches the design of modern buildings.



Titanium Technology – windows more durable than any others

T-Passive Perfekt window profiles are manufactured using modern Titanium Technology. As a result of combining - at the stage of material processing - full-value PVC with titanium oxide admixture, we obtain a window profile with high rigidity, high resistance to discoloration, and harmful effects of sunlight.



Thermal performance – retain heat with 3 gaskets

T-Passive Perfekt windows are equipped with as many as 3 gaskets as standard, which in combination with the warm glazing package ensures perfect insulation.



Ecology

T-Passive Perfekt windows are certified to be free of lead, cadmium, and other heavy metal compounds. By choosing our windows, you can be sure that you contribute to the fact that the world around us is not contaminated with these harmful substances.



T-Passive Perfekt in Wooddec toffee oak with concealed handles:
 HOPPE Toulon Secustik® handle: gold F4; concealed hinges



Original design


- ▣ **21 available colors**
 from classic white to the most fashionable Earth colors - on one or both sides
- ▣ **modern form**
 subtle window frame with simple geometry
- ▣ **mass-colored profile**
 the color of the window in two-sided color, visible after its opening is matched to the color of the veneer:
white, caramel, brown, anthracite



Matching terrace solutions

Ensure a consistent look throughout your home by choosing dedicated sliding patio door solutions.

- ▣ **T-Passive Perfekt Forte balcony doors.**
 with a comfortable, low aluminum threshold and a double-sided handle.
- ▣ **HKS tilting/sliding patio doors**
 a modern alternative to traditional "tilt or slide" balcony door systems
- ▣ **T-Slide lifting/sliding patio doors**
 premium doors that blur the line between the interior of the house and the exit to the patio.

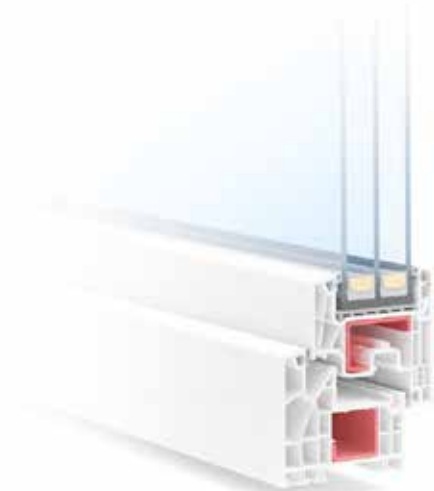

6 chambers depth of
 frame 82 mm

Design your window

1 Take care of the right energy efficiency



| NUMBER OF CHAMBERS | | |
|---|-----------------|---|
| 2 | 3 | 3 |
| NUMBER OF GASKETS | | |
| 3 | 3 | 3 |
| HEAT TRANSFER COEFFICIENT OF GLAZING(U _g) | | |
| 1,1 W/m²K | 0,6 W/m²K | 0,5 W/m²K |
| 4/20Ar/4 | 4/14Ar/4/14Ar/4 | 4/18Ar/4/18Ar/4 with a warm glass frame |

*U_w value (heat transfer coefficient for a window) measured in accordance with DIN EN ISO 10077-2 for a reference, single-leaf window with dimensions: 1230 mm x 1480 mm.

2 Select a frame



standard




renovation 65 mm


3 Select the level of security




Standard hardware



Security hardware



RC1 type hardware



RC2 type hardware

| | | | |
|-----------------------------------|---|--|--|
| 1 burglar-resistant locking point | All burglar-resistant locking points – the number depends on the size of the window | 4 burglar-resistant locking points fixed to steel reinforcements | A minimum of 8 burglar-resistant locking points attached to steel reinforcements |
| - | - | safeguard against reaming the handle | safeguard against reaming the handle |
| Standard handle | Standard handle | Handle with key | Handle with key |
| Standard low-e glass | Standard low-e glass | Anti-burglary glass | Anti-burglary glass |

4 Select your color

GROUP I

| | | | | | | | |
|---------------------------------|------------------------------------|--------------------|------------------------------|-----------------------|----------------------------------|---------------------------|------------------------|
| polish pine G4301-G7 | black smooth F4466062 | walnut UK103-Z8 | coal grey smooth KDB74-F7 | solar oak UK101-Z8 | coal grey structural KDB74-Z8 | crystal white WAQ50-Z6 | norman oak A1002-Z3 |
| sheffield oak light F4563081 | woodec turner oak malt F4703001 | white in mass | | | | | |

GROUP II

| | | | | | | | |
|-------------------------|--------------------------|--------------------|-------------------------|----------------------------|-------------------------|--------------------------------------|-------------------------|
| quartz grey KACV8-Z8 | vintage pine B2303-G7 | sapeli UR602-Z8 | stripe pine G0502-Z8 | charcoal brown NDS62-Z8 | cream white YEM69-Z8 | woodec turner oak toffee F4703004 | carbone oak F4709026 |
|-------------------------|--------------------------|--------------------|-------------------------|----------------------------|-------------------------|--------------------------------------|-------------------------|

GROUP III

| | |
|--------------------------|-----------------------|
| asteroid basalt DB703 | brown oak UQ901-Z8 |
|--------------------------|-----------------------|



5 Select your handle



silver f1



classic handle



gold f4



Hoppe HAMBURG SecuForte® handle



black matt



Hoppe TOULON SECUSTIK® handle

6 Choose the right glazing



low-emission



sun protection



laminated
/anti-burglary



soundproof



with ornament



with muntin bar

7 Select additional accessories



window ventilators



roller shutters



drip cap



T-Passive Perfekt vintage pine with central handle; handle HOPPE Atlanta Secustik® silver F1; hidden hinges

8 Be sure to install properly

Dear Customer, if you want our windows to serve you for many years, maintaining their technical parameters and ensuring your safety, take care of their correct installation. The solution that will provide you with the highest insulation parameters is the so-called warm installation.

9 Discover our other products



T-Passive Energy
6 chambers
depth of frame: 88 mm



T-Passive Plus
8 chambers
depth of frame: 70 mm



T-Slim
7 chambers
depth of frame: 70 mm



T-Classic
7 chambers
depth of frame: 70 mm



T-Comfort
6 chambers
depth of frame: 70 mm



BUDVAR

www.budvarcentrum.eu

Visit the download tab - a place where you will find all the necessary materials
www.budvarcentrum.eu/materials-for-downloading



and on our social media channels



BUDVAR Centrum Sp. z o.o. | Postępu 10, 02-676 Warsaw
correspondence address: Przemysłowa 36, 98-220 Zduńska Wola
tel. +48 (43) 824 31 32 | e-mail: windows@budvarcentrum.eu